

Onshore & Offshore
Rehabilitation & New Construction Pipelines
Under & Aboveground Application

Protecting the future

Protective coatings
by STOPAQ




Buried
Assets



Condensing
Line



Casing
Filler



Offshore
Field Joints




Field
Automated
System



Splash
Zone



Corrosion
Under Insulation



Insulation
Cladding
and Sealing



Self Healing Corrosion Prevention
& Sealant Technology



SEALFORLIFE
Industries

Profile

STOPAQ EUROPE B.V. produce a totally unique and innovative range of products, based on viscous-elastic technology. The solutions are crucial for the long term protection against the damages caused by water infiltration and corrosion. The patented STOPAQ products have been widely used throughout the world by major oil and gas, construction, telecommunications, power, water/waste water and utility companies.

References

STOPAQ® products are applied to every type of corrosion problem, often under difficult circumstances. Approved by major oil and gas companies such as Shell Global Solutions B.V. Pertamina Hulu Energy OSES, Medco Energi, Pertamina Gas Negara, Pertamina Hulu Mahakam, HCML, PGN Saka Energi, ExxonMobil, Saudi Aramco, Gasunie Netherlands and numerous International Companies, STOPAQ is used continuously and applied in extreme environments ranging from the Middle East to Sakhalin Island Russia.

STOPAQ products are certified according to ISO 21809, KIWA BRL K911 and NSF/ANSI 61.

Industry sectors using STOPAQ products are:

- Oil and Gas
- Chemical and Petrochemical
- Heavy Industries
- Mining
- Marine
- Water and Waste Water

Philosophy

STOPAQ Europe has developed a range of viscous-elastic products that give a new philosophy to the field of corrosion prevention and sealing. STOPAQ materials have been developed to be environmentally friendly, cold applied in the field & need minimal surface preparation so they do not endanger health or risk our environment.


R&D

STOPAQ EUROPE B.V. Invests highly in Research and Development to maintain its technological lead and develop new applications. Testing and research is carried out in the laboratory at Stadskanaal. The high quality of the products is continuously monitored according to sound quality procedures, from concept to application. STOPAQ EUROPE B.V. Operates according to NEN-EN ISO 9001.

STOPAQ is at heart a Polyisobutene (PIB) based coating, engineered to provide self-healing preservation, protecting corroding materials such as steel. It contains non crystalline, non curing and non cross-linked polymers. This leads to permanent adhesion to the surface, extended lifetime of the coating and asset protection.

Save time and money

- Fast installation with excellent adhesion to any surface without applying a primer
- Impermeable to oxygen and water
- Self-healing when slightly damaged
- Minimal surface preparation surface required
- Does not age, crack, tear or break
- Environmentally friendly

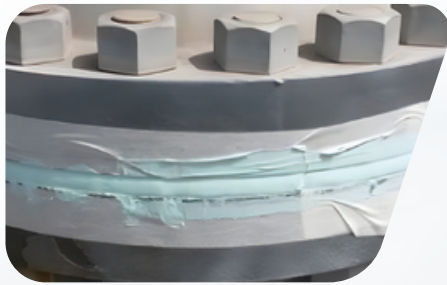


STOPAQ FN 4200 FILLER

FN 4200 Filler is used as a filler, which used to fill narrow gaps in between flanges and as a sealant in the STOPAQ Tank Chime area system. With temperature range -45°C to 100°C . Applicable for Flanges and Tank Chime are.



STOPAQ WRAPPINGBAND

Wrappingband CZH and CZHT are used as a wrap-around corrosion prevention layer of the STOPAQ corrosion prevention system on tubular objects. With temperature ranges -45°C to 95°C . Applicable for Pipelines, Flanges, Elbow, T-joint, Reducer, and all tubular objects.




STOPAQ PASTE

Paste CZH and CZHT are used a moldable corrosion prevention layer to fill up irregular shaped objects and to bevel any sharp edges. With temperature range -45°C to 95°C . Applicable for Flanges, Valves, Pinbrases and all irregular shaped objects.



STOPAQ OUTERWRAP

Outerwrap PVC, PE, HTPP and intermediate PVC are used as a flexible mechanical protection tape over the STOPAQ corrosion prevention materials on underground, atmospheric and underwater tubular objects. With temperature range -45°C to 95°C . Applicable for Pipelines, Flanges, Elbows, T-joint, Reducer and all tubular objects.



STOPAQ WRAPPINGBAND WSH AND PASTE WSH

Wrappingband WSH and Paste WSH are corrosion prevention materials for wet or submerged tubular objects. Paste is used as a corrosion prevention layer to fill up irregular shapes and Wrappingband as a wrap-around layer. With Temperature ranges -45°C to 70°C . Applicable for Splash Zone, Submerged pipelines, condensing pipelines and condensing flanges.



STOPAQ WRAPPINGBAND EZ


Wrappingband EZ is used as sealing material on the tank chime areas, or as a corrosion prevention material for atmospheric applications. The materials have a coat able backing with temperature ranges -45°C to 95°C . Applicable for Tank Chime area, atmospheric assets, structural steel, anchor bolt, etc.






Corrosion Prevention for Dry System:

STOPAQ WRAPPINGBAND - CZH
STOPAQ WRAPPINGBAND - CZHT
STOPAQ PASTE - CZH
STOPAQ PASTE - CZHT

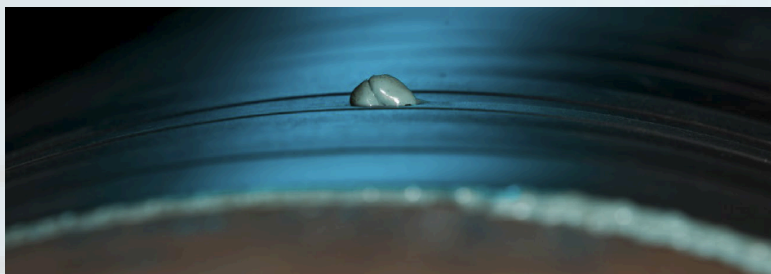

Mechanical Protection:

STOPAQ OUTERWRAP - PE
STOPAQ OUTERWRAP - PVC
STOPAQ OUTERWRAP - HTPP

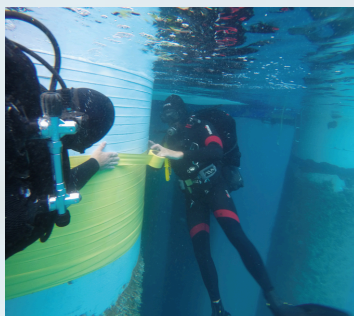

Corrosion Prevention for Wet System:

STOPAQ WRAPPINGBAND WSH
STOPAQ PASTE - WSH

Mechanical Protection:

STOPAQ INTERMEDIATE PVC

Extra Mechanical Protection:

STOPAQ OUTERGLASS SHIELD



SEI / RightPro Engineering
PT. Sincerity Energy Indonesia

STOPAQ
Self Healing Corrosion Prevention
& Sealant Technology

SEALFORLIFE
Industries



PT SINCERITY ENERGY INDONESIA
Jl. Raya Tanjung Barat 155
Jakarta Selatan, 12530, Indonesia
Tel: +62 21 788 40 737
Fax: +62 21 781 64 33
Email: sales@sincerityenergy.co.id
Web: www.sincerityenergy.co.id

